

HIGH PERFORMANCE COOL AIR INTAKE KIT




INSTALLATION INSTRUCTIONS

75-1525 DODGE

RAM L6 5.9L TURBO DIESEL

Qty	Parts List	Qty	Parts List	Tools Required
1	4"-2" Adapter	3	1/4" ID Fender Washers	7/16" Wrench or Socket
1	Intake Tube	3	1" OD Rubber Washers	Phillips Head Screwdriver
1	Intake Box	5	#10 Sealing Washers	5/16" Nut Driver or Socket
1	Intake Lid	5	SS Pan Head Screws	
1	Instruction Sheet	1	Air Filter	
2	#64 Hose Clamps			
3	1/4"-20 Nylock Nuts			

1. Disconnect both battery cables from the batteries. Loosen hose clamp on EOM stock air intake tube at turbo.

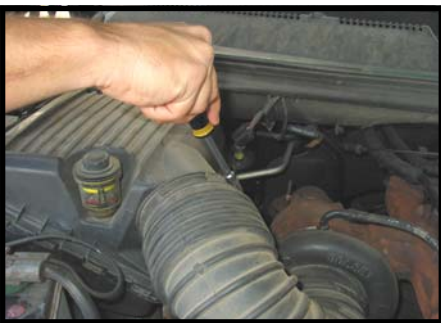

2. Release the four clips that retain the air box top to the air box base. Detach the air intake tube from the flange on the tube and remove the upper air intake assembly.



3. Remove duct from fenderwell, then pull upward on the air base to release it from fenderwell.



4. Picture depicting engine compartment after Step #3 has been successfully completed.



5. Insert the rubber spacers over studs.



6. Install box over studs using washers and locknuts supplied.



7. Install rubber adapter onto turbo.



8. Install air intake tube by inserting it into the rubber adapter at turbo.



9. Slide hose clamp over opposite end of air intake tube.



10. Install S&B High Performance Filter and tighten onto air intake tube using hose clamp.



11. Install S&B air box lid using the provided #10 screws and washers.



12. Reconnect both negative battery terminals. Installation is now complete.



PERFORMANCE TESTING

- Engage parking brake and start your engine. To ensure that the system was installed properly, listen for abnormal noises. If an air leak is detected, re-inspect hoses and connections as they may need to be tightened.
- S&B FILTERS RECOMMENDS THAT YOU KEEP YOUR OEM INTAKE SYSTEM IN THE EVENT IT IS REQUIRED IN THE FUTURE.
- In order to maintain proper warranty, all connections and components must be checked periodically for realignment and to tighten all connections. Failure to do so will void your warranty.

Use only S&B cleaning and oil products to service your filter. Using another company's oil and cleaner products may void your warranty.

**Please call (909) 947-0015
should you have any questions or
comments.**

RESTORE YOUR HIGH PERFORMANCE FILTER

PRECISION CLEANING & OILING KIT

S&B'S Precision Cleaning & Oiling Kit allows vehicle owners to properly maintain their high performance air filters by precisely applying the correct amount of oil. The clearly marked bottle and easy-to-use applicator allow the user to measure and apply the proper amount of oil for each application. S&B has conducted extensive testing with the Precision Cleaning Kit to ensure that it can be used on most cotton high performance filters available today.

Part No. 88-0005 Order online today at www.sbfilters.com
or through your local S&B Distributor

